

Sarnafil® T Scupper

Injection moulded FPO roof drain

Product Description The Sarnafil® T Scupper is made of rigid high quality polyolefin by injection moulding procedure.

Uses The Sarnafil® T Scupper is used as rainwater outlet through the parapet in flat roofs.

Characteristics / Advantages

- Outstanding resistance to weathering, including UV irradiation
- Outstanding stress-cracking resistance
- Membrane can be welded directly to the base plate
- Ease of application
- Excellent weldability
- Recyclable

Tests

Approvals / Standards ■ Quality management system EN ISO 9001/14001

Product Data

Form

Appearance Surface: smooth

Colour Beige

Packaging Depending on the order quantity and product size, the products are packaged on pallets or in cartons.




Storage

Storage Conditions The Sarnafil® T Scupper shall be stored in dry conditions.

Shelf-Life The Sarnafil® T Scupper does not expire during correct storage.

Roofing



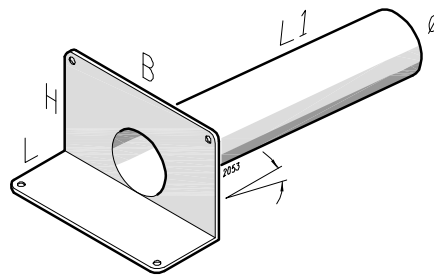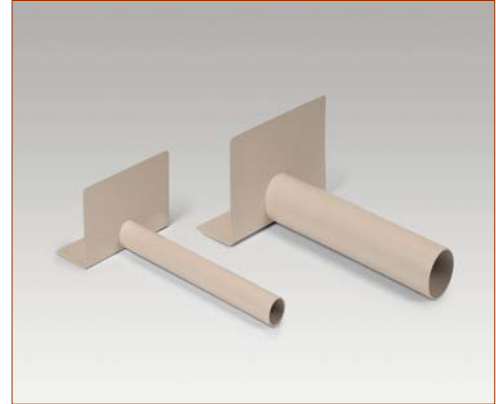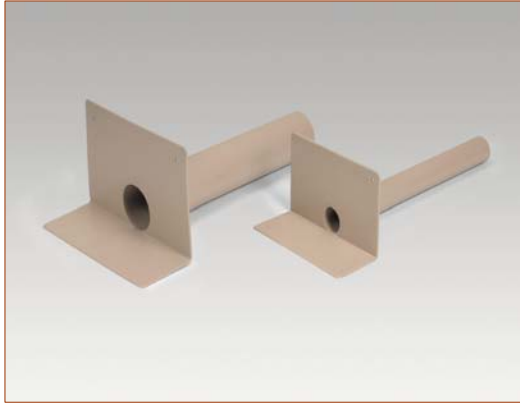

Art. No.	Spigot			Base plate 90° angled B x H/L	Flow rates
	ø outside	length L1	inclination angle		
111972	40 mm	450 mm	5°	250 mm x 145/105 mm	0.17 l/s
111973	50 mm	450 mm	5°	250 mm x 145/105 mm	0.22 l/s
111975	63 mm	450 mm	5°	320 mm x 200/120 mm	0.28 l/s
111977	75 mm	450 mm	5°	320 mm x 200/120 mm	0.33 l/s
111979	90 mm	450 mm	5°	320 mm x 200/120 mm	0.39 l/s

Technical Data

Material Basis Polypropylene (PP)

Thickness 3.0 mm

System Information

System Structure	Compatible products:	<ul style="list-style-type: none">- Sarnafil® TG 66 - types- Sarnafil® TS 77 - types- Sarnafil® TG 76 - types- Sarnafil® TCG - types (T Prep required)- Sarnafil® TCS - types (T Prep required)
-------------------------	----------------------	---

Application Conditions / Limits

Temperature	The use of the Sarnafil® T Scupper is limited to geographical locations with average monthly minimum temperatures of -50 °C. Permanent ambient temperature during use is limited to +50 °C.
--------------------	--

Installation Instructions

Installation Method	According to the valid installation instructions for Sarnafil® T/TC. The Sarnafil® T Scupper needs to be fastened securely to the roof parapet.
----------------------------	--

Notes on Installation / Limits	<p>Installation works must be carried out only by Registered Sarnafil T/TC Trained Contractors.</p> <p>Temperature limits for the installation of the Sarnafil® T Scupper:</p> <p>Substrate temperature: -30 °C min. / +60 °C max. Ambient temperature: -20 °C min. / +60 °C max.</p> <p>Installation of some ancillary products, e.g. contact adhesives / cleaners is limited to temperatures above +5 °C. Please observe information given by Product Data Sheets.</p> <p>Special measures may be compulsory for installation below +5 °C ambient temperature due to safety requirements in accordance with national regulations.</p>
---------------------------------------	--

Value Base	All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.
Local Restrictions	Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.
Ecology, Health and Safety Information	The product does not fall within the EC-regulation of hazardous goods. As a result, a material safety data sheet following EC-Guideline 91/155 EWG is not needed to bring the product to the market, transport or use it. The product does not damage the environment when used as specified.
Protective Measures	Fresh air ventilation must be ensured, when working (welding) in closed rooms. Local safety regulations must be observed.
Transportation Class	The product is not classified as hazardous good for transport.
Disposal	The material is recyclable. Disposal must be in accordance with regulatory requirements.

All data in our product information are based on our current knowledge and experience. They do not release users from careful testing of the application and strict observation of the relevant processing regulations because of the wide range of possible influences during the application and use of our products. Legally valid assurances of specific characteristics or suitability for special purposes of application other than those provided in our documentation for the specific product cannot be inferred from our information. Any protective rights or existing laws and provisions must be followed by the recipient or processor of our products at their own responsibility. Moreover our general terms and conditions of sale and guarantee are valid.



Sika Ltd, Bankside 300, Peachman Way, Broadland Business Park,
Norwich, NR7 0WF.

Tel: 01603 709360 Fax: 01603 433436 Email: sarnafilroofing@uk.sika.com

Registered Office: Sika Ltd, Watchmead, Welwyn Garden City, Hertfordshire, AL7 1BQ
Registered in England: 226822



Sarnafil®