

SYSTEM DATA SHEET

Sikafloor® MultiDur EB-31 ECF

BROADCAST, UNICOLOUR CONDUCTIVE EPOXY FLOOR COVERING
WITH HIGH CHEMICAL RESISTANCE AND SLIP RESISTANCE

PRODUCT DESCRIPTION

Sikafloor® MultiDur EB-31 ECF is a two part, electrostatic conductive self-smoothing, broadcast coloured epoxy flooring system with very high chemical resistance. "Total solid epoxy composition acc. to the test method Deutsche Bauchemie e.V. (German Association for construction chemicals)".

USES

Sikafloor® MultiDur EB-31 ECF may only be used by experienced professionals.

It is used as:

- Chemically highly resistant and slip resistant coating for concrete and screed surfaces in bund areas for the protection against water contaminating liquids (contact Sika technical service for specific information)
- Electrostatic conductive wearing layer for areas subject to chemical and mechanical exposure in production and storage facilities

CHARACTERISTICS / ADVANTAGES

- Very high chemical resistance
- High mechanical resistance
- Impervious to liquids
- Abrasion resistant
- Electrostatic conductive
- Slip resistant surface


APPROVALS / STANDARDS

- Resin: Synthetic resin screed material according to EN 13813:2002, Declaration of Performance 02 08 01 02 019 0 000010 2017, and provided with the CE marking.
- Resin: Coating for surface protection of concrete according to EN 1504-2:2004, Declaration of Performance 02 08 01 02 019 0 000010 2017, and provided with the CE marking.
- Resin: Reaction to fire classification acc. to DIN EN 13301-1. Test report No.: 2013-B-1413/01.
- Resin: Particle emission certificate Sikafloor®-381 ECF CSM Statement of Qualification - ISO 14644-1, class 4 - Report No. SI 1312-681

SYSTEM INFORMATION

System Structure

Sikafloor® MultiDur EB-31 ECF:

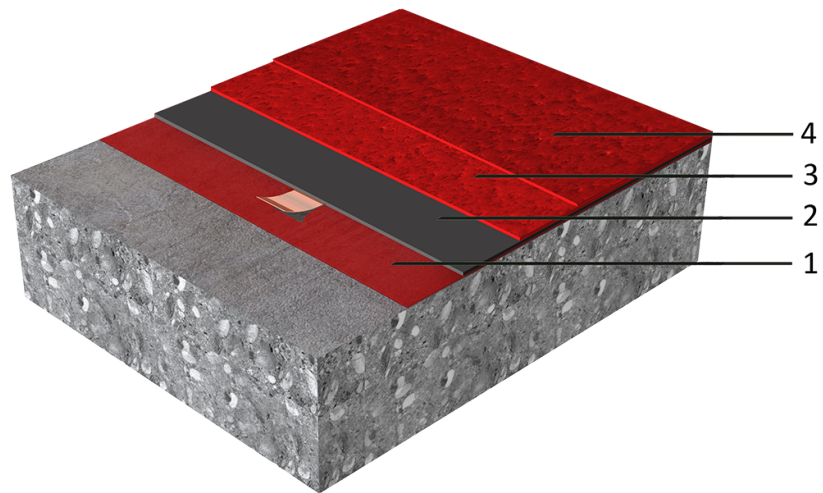

1. Primer + Earthing connection	Sikafloor®-156/-161+ Sika® Earthing Kit
2. Conductive primer	Sikafloor®-220 W Conductive
3. Conductive base coating + broadcasting	Sikafloor®-381 ECF (unfilled), broadcast to excess with silicone carbide 0.5-1.0 mm.
4. Final topcoat	Sikafloor®-381 + 5 % wt.-% Thinner C

The system configurations as described must be fully complied with and may not be changed.

Chemical base	Epoxy
Appearance	Broadcast - semi gloss
Colour	Almost unlimited choice of colour shades. Under direct sun radiation there may be some discolouration and colour deviation, this has no influence on the function and performance of the coating.
Nominal Thickness	~ 2.0 - 2.5 mm

TECHNICAL INFORMATION

Compressive Strength	~ 80 N/mm ² (Sikafloor-381 (14 days / +23 °C) ECF filled acc. PDS)	(EN 196-1)
Tensile Strength	~ 55 N/mm ² (Sikafloor®-381 ECF filled acc. PDS)	(14 days / +23 °C) (EN 196-1)
USGBC LEED Rating	Conforms to the requirements of LEED EQ Credit 4.2: Low-Emitting Materials: Paints & Coatings SCAQMD Method 304-91 VOC Content <100 g/l.	
Electrostatic Behaviour	Resistance to ground ¹	R _g < 10 ⁹ Ω (IEC 61340-4-1)
	Typical average resistance to ground ²	R _g < 10 ⁶ Ω (DIN EN 1081)

¹ In accordance with IEC 61340-5-1 and ANSI/ESD S20.20.

² Readings may vary, depending on ambient conditions (i.e. temperature, humidity) and measurement equipment.

APPLICATION INFORMATION

Consumption	Coating	Product	Consumption
	Primer	Sikafloor®-156/-161	1-2 x ~ 0.3 - 0.5 kg/m ²
	Levelling (if required)	Sikafloor®-156/-161 levelling mortar	Refer to PDS of Sikafloor®-156/-161
	Earthing connection	Sika® Earthing Kit	1 earthing point per approx. 200 -300 m ² , min. 2 per room.
	Conductive primer	Sikafloor®-220 W Conductive	1 x 0.08 - 0.10 kg/m ²
	Conductive base coating	Sikafloor®-381 ECF, unfilled	1x 1.6 kg/m ² Binder, broadcast to excess with silicone carbide 0.5-1.0. mm*
	Final topcoat	Sikafloor®-381 + 5 % Thinner C	0.75 - max. 0.85 kg/m ²

These figures are theoretical and do not allow for any additional material due to surface porosity, surface profile, variations in level or wastage etc.
 *Silicone carbide "SiC 18/35 in a splintery grain shape and a grain size of 0.5-1.0 mm" can be purchased from ESH-SiC GmbH, Günter-Wiebecke-Str. 1, 50226 Frechen, Germany, <http://www.esk-sic.com>. As alternative the conductive aggregate "Granucol Conduct No. 7" (grain size 0.6 - 1.2 mm) can be used. Supplier: Gebrüder Dorfner GmbH & Co. Kaolin- und Kristallquarzsand-Werke KG, Scharhof 1, 92242 Hirschau, Germany, <http://www.dorfner.com>

Ambient Air Temperature	+10 °C min. / +30 °C max.																																					
Relative Air Humidity	80 % r.h. max.																																					
Dew Point	Beware of condensation! The substrate and uncured floor must be at least 3 °C above dew point to reduce the risk of condensation or blooming on the floor finish.																																					
Substrate Temperature	+10 °C min. / +30 °C max.																																					
Substrate Moisture Content	<4 % pbw moisture content. Test method: Sika Tramex Meter, CM-measurement or Oven-Dry-Method. No rising moisture according to ASTM (Polyethylene-sheet).																																					
Waiting Time / Overcoating	Before applying Sikafloor®-220 W Conductive on Sikafloor®-156/161 allow: <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Substrate temperature</th> <th>Minimum</th> <th>Maximum</th> </tr> </thead> <tbody> <tr> <td>+10 °C</td> <td>24 hours</td> <td>4 days</td> </tr> <tr> <td>+20 °C</td> <td>12 hours</td> <td>2 days</td> </tr> <tr> <td>+30 °C</td> <td>8 hours</td> <td>1 days</td> </tr> </tbody> </table> Before applying Sikafloor®-381 ECF on Sikafloor®-220 W Conductive allow: <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Substrate temperature</th> <th>Minimum</th> <th>Maximum</th> </tr> </thead> <tbody> <tr> <td>+10 °C</td> <td>26 hours</td> <td>7 days</td> </tr> <tr> <td>+20 °C</td> <td>17 hours</td> <td>5 days</td> </tr> <tr> <td>+30 °C</td> <td>12 hours</td> <td>4 days</td> </tr> </tbody> </table> Before applying Sikafloor®-381 on Sikafloor®-381 ECF broadcast with conductive aggregate allow: <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Substrate temperature</th> <th>Minimum</th> <th>Maximum</th> </tr> </thead> <tbody> <tr> <td>+10 °C</td> <td>48 hours</td> <td>3 days</td> </tr> <tr> <td>+20 °C</td> <td>24 hours</td> <td>2 days</td> </tr> <tr> <td>+30 °C</td> <td>12 hours</td> <td>1 days</td> </tr> </tbody> </table> Times are approximate and will be affected by changing ambient conditions particularly temperature and relative humidity.		Substrate temperature	Minimum	Maximum	+10 °C	24 hours	4 days	+20 °C	12 hours	2 days	+30 °C	8 hours	1 days	Substrate temperature	Minimum	Maximum	+10 °C	26 hours	7 days	+20 °C	17 hours	5 days	+30 °C	12 hours	4 days	Substrate temperature	Minimum	Maximum	+10 °C	48 hours	3 days	+20 °C	24 hours	2 days	+30 °C	12 hours	1 days
Substrate temperature	Minimum	Maximum																																				
+10 °C	24 hours	4 days																																				
+20 °C	12 hours	2 days																																				
+30 °C	8 hours	1 days																																				
Substrate temperature	Minimum	Maximum																																				
+10 °C	26 hours	7 days																																				
+20 °C	17 hours	5 days																																				
+30 °C	12 hours	4 days																																				
Substrate temperature	Minimum	Maximum																																				
+10 °C	48 hours	3 days																																				
+20 °C	24 hours	2 days																																				
+30 °C	12 hours	1 days																																				

Applied Product Ready for Use

Temperature	Foot traffic	Light traffic	Full cure
+10 °C	~ 24 hours	~ 3 days	~ 10 days
+20 °C	~ 18 hours	~ 2 days	~ 7 days
+30 °C	~ 12 hours	~ 1 days	~ 5 days

Note: Times are approximate and will be affected by changing ambient conditions

PRODUCT INFORMATION

Packaging Please refer to individual Product Data Sheet.

Shelf Life Please refer to individual Product Data Sheet.

Storage Conditions Please refer to individual Product Data Sheet.

MAINTENANCE

To maintain the appearance of the floor after application, Sikafloor® MultiDur EB-31 ECF must have all spillages removed immediately and must be regularly cleaned using rotary brush, mechanical scrubbers, scrubber dryer, high pressure washer, wash and vacuum techniques etc. using suitable detergents.

CLEANING

Please refer to the individual Sikafloor® Cleaning Regime.

FURTHER DOCUMENTS

Please refer to:

- Sika® Information Manual Mixing and Application of Flooring Systems
- Sika® Information Manual Surface Evaluation & Preparation

LIMITATIONS

- Due to the nature of carbon fibres providing the conductivity, surface irregularities might be possible. This has no influence on the function and performance of the coating.
- Do not apply the Sikafloor® MultiDur EB-31 ECF System on substrates in which significant vapour pressure may occur.
- Do not blind the primer.
- The freshly applied final conductive coating of the Sikafloor® MultiDur EB-31 ECF system must be protected from damp, condensation and water for at least 24 hours.
- Only start application of Sikafloor® conductive primer after the priming coat has dried tack-free all over. Otherwise there is a risk of wrinkling or impairing of the conductive properties.
- Maximum layer thickness of final conductive coating: ~ 1.5 mm. Excessive thickness (more than 2.5 kg/m²) causes reduced conductivity.
- Under certain conditions, underfloor heating combined with high point loading, may lead to imprints in the resin.
- If heating is required do not use gas, oil, paraffin or other fossil fuel heaters, these produce large quantities of both CO₂ and H₂O water vapour, which may adversely affect the finish. For heating use only elec-

tric powered warm air blower systems.

- The incorrect assessment and treatment of cracks may lead to a reduced service life and reflective cracking - reducing or breaking conductivity.
- For exact colour matching, ensure the final topcoat of the Sikafloor® MultiDur EB-31 ECF system in each area is applied from the same control batch numbers.
- The test person, ambient conditions, measurement equipment, cleanliness of the floor have a substantial influence on the measurement results.

All measurement values for the Sikafloor® MultiDur EB-31 ECF system stated in the system data sheet (apart from the ones referring to proof statements) were measured under the following conditions:

Ambient conditions:	+23 °C/50%
Measurement device for the Resistance to Ground:	Metriso 2000 (Warmbier) or comparable
Surface resistance probe:	Tripod electrode acc. DIN EN 1081
Rubber pad hardness:	Shore A 60 (± 10)

The number of conductivity measurements is strongly recommended to be as shown in the table below:

Ready applied area	Number of measurements
< 10 m ²	6 measurements
< 100 m ²	10-20 measurements
<1000 m ²	50 measurements
<5000 m ²	100 measurements

In case of values lower/higher as required, additional measurements has to be carried out, approx. 30 cm around the point with insufficient readings. If the newly measured values are in accordance with the requirements, the total area is acceptable.

Installation of earthing points: Please refer to the Information Manual: "MIXING & APPLICATION OF FLOORING SYSTEMS".

Numbers of earth connections: Per room at least 2 earthing points. The optimum number of earth connections depends on the local conditions and should be specified using available drawings.

VALUE BASE

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

SIKA LIMITED

Watchmead

Welwyn Garden City
Hertfordshire, AL7 1BQ
Tel: 01707 394444
Web: www.sika.co.uk
Twitter: @SikaLimited

SIKA IRELAND LIMITED

Ballymun Industrial Estate

Ballymun
Dublin 11, Ireland
Tel: +353 1 862 0709
Web: www.sika.ie
Twitter: @SikaIreland



SikafloorMultiDurEB-31ECF_en_GB_(11-2016)_1_2.pdf

System Data Sheet
Sikafloor® MultiDur EB-31 ECF
November 2016, Version 01.02
020811900000000042