

SYSTEM DATA SHEET

Sikafloor® MultiDur EB- 10

Slip-resistant, coloured, epoxy floor coating system

PRODUCT DESCRIPTION

Sikafloor® MultiDur EB- 10 is a broadcast, coloured, rigid epoxy floor coating system for areas subject to traffic and high mechanical loads.

USES

Sikafloor® MultiDur EB- 10 may only be used by experienced professionals.

Sikafloor® MultiDur EB- 10 is used in industrial buildings such as:

- Car park decks
- Food and beverage facilities
- Logistics facilities and warehouses
- Manufacturing facilities and workshops

Please note:

- The System may only be used by experienced professionals.
- The System may only be used for interior applications.

CHARACTERISTICS / ADVANTAGES

- Low odour
- Low VOC emissions
- Good mechanical resistance
- Good resistance to specific chemicals
- Good slip resistance
- Low maintenance
- Seamless


APPROVALS / STANDARDS

- Reaction to fire EN 13501-1, Sikafloor® MultiDur EB- 10, GHENT, Test Report No. CR 24-1080-01

SYSTEM INFORMATION

System Structure

Sikafloor® MultiDur EB- 10

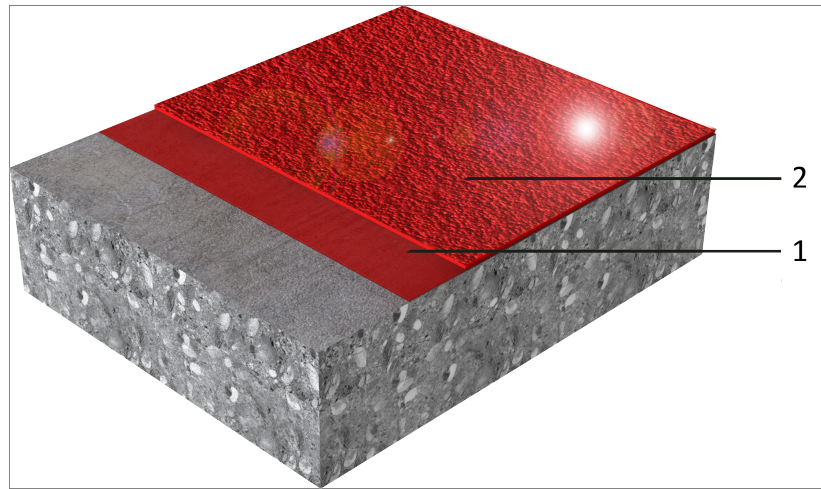

Sikafloor® MultiDur EB- 10 : System A (~ 1 to 2 mm. thickness)

Primer	Sikafloor®-150 Plus, or Sikafloor®-151, or Sikafloor®-1590
Broadcast in excess	Quartz sand 0.3–0.8 mm
Top Coat	1 - 2x Sikafloor® MultiDur EB- 10

Sikafloor® MultiDur EB- 10 : System B (~ 2 to 3 mm. thickness)

Scratch coat	Sikafloor®-150 Plus, or Sikafloor®-151, or Sikafloor®-1590
Broadcast in excess	Quartz sand 0.3–0.8 mm
Top Coat	1 - 2x Sikafloor® MultiDur EB- 10

Sikafloor® MultiDur EB- 10 : System C (~ 3 to 4 mm. thickness)

Scratch coat	Sikafloor®-150 Plus, or Sikafloor®-151, or Sikafloor®-1590
Broadcast in excess	Quartz sand 0.3–0.8 mm
Top Coat	1 - 2x Sikafloor® MultiDur EB- 10

Sikafloor® MultiDur EB- 10 : System D (~ 5 to 6 mm. thickness)

Primer	Sikafloor®-150 Plus, or Sikafloor®-151, or Sikafloor®-1590
Broadcast in excess	Quartz sand 0.7–1.2 mm
Body Coat	1 × Sikafloor®-150/151/1590 filled at 1:1 with quartz sand 0.06–0.3mm + 2% Extender T
Broadcast in excess	quartz sand 0.7–1.2 mm
Top Coat	1 - 2x Sikafloor® MultiDur EB- 10

Contact Sika Technical Service for information on choosing the right primer for your project.

Composition	Epoxy
Appearance	Slip-resistant, gloss finish
Colour	Available in various colour shades

Nominal thickness	2 mm to 3 mm
-------------------	--------------

TECHNICAL INFORMATION

Tensile adhesion strength	≥ 1.5 MPa	(EN 1542)
Reaction to Fire	Class B _{fl} -s1	(EN 13501-1)
Chemical Resistance	Laboratory-defined resistance to many individual chemicals. Before proceeding, contact Sika Technical Service for specific information.	
Skid / Slip Resistance	Class	R 12 (DIN 51130)

APPLICATION INFORMATION

Consumption

Sikafloor® MultiDur EB- 10 : System A (~ 1 to 2 mm. thickness)

Thin coating system where substrate requirements are minimal. (e.g., new build projects)

Layer	Product	Consumption
Primer	Sikafloor®-150 Plus/-151/-1590 filled at 1:0.5 with quartz sand 0.06–0.3mm.	~ 0.6 - 0.9 kg/m ²
Broadcast in excess	Quartz sand 0.3–0.8 mm	~ 5 kg/m ²
Top Coat	1 - 2x Sikafloor®-264 Plus	~ 0.6 kg/m ²

Sikafloor® MultiDur EB- 10 : System B (~ 2 to 3 mm. thickness)

Coating system with a light scratch coat suitable for low-traffic areas. (e.g., car park bays, light industrial traffic)

Layer	Product	Consumption
Scratch coat	Sikafloor®-150 Plus/-151/-1590 filled at 1:0.5 with quartz sand 0.06–0.3mm.	~ 1.2 kg/m ²
Broadcast in excess	Quartz sand 0.3–0.8 mm	~ 5 kg/m ²
Top Coat	1 - 2x Sikafloor®-264 Plus	~ 0.7 kg/m ²

Sikafloor® MultiDur EB- 10 : System C (~ 3 to 4 mm. thickness)

Coating system with a heavy scratch coat suitable for traffic areas. (e.g., driving aisles, forklift traffic)

Layer	Product	Consumption
Scratch coat	Sikafloor®-150 Plus/-151/-1590 filled at 1:0.5 with quartz sand 0.06–0.3mm.	~ 1.8 kg/m ²
Broadcast in excess	Quartz sand 0.3–0.8 mm	~ 6 kg/m ²
Top Coat	1 - 2x Sikafloor®-264 Plus	~ 0.7 kg/m ²

Sikafloor® MultiDur EB- 10 : System D (~ 5 to 6 mm. thickness)

Coating system with an intermediate body coat suitable for heavy traffic areas.(e.g: car park ramps, heavy industrial traffic)

Layer	Product	Consumption
Primer	Sikafloor®-150 Plus/-151/-1590 filled at 1:0.5 with quartz sand 0.06–0.3mm.	~ 0.4 kg/m ²
Broadcast in excess	Quartz sand 0.7–1.2 mm	~ 2-3 kg/m ²
Body Coat	1 × Sikafloor®-150/-151/-1590 filled at 1:1 with quartz sand 0.06–0.3mm + 2% Extender T	~ 3.2 kg/m ²
Broadcast in excess	Quartz sand 0.7–1.2 mm	~ 5 kg/m ²
Top Coat	1 - 2x Sikafloor®-264 Plus	~ 0.7 kg/m ²

Note: Consumption data is theoretical and does not allow for any additional material due to surface porosity, surface profile, variations in level, wastage or any other variations. Apply the product to a test area to calculate the exact consumption of the specific substrate conditions and proposed application equipment.
Contact Sika Technical Service for information on choosing the right primer for your project.

Ambient Air Temperature	Maximum	+30 °C
	Minimum	+10 °C

Relative Air Humidity	Maximum	80 % r.h.
------------------------------	---------	-----------

Dew Point	Refer to the individual Product Data Sheet.	
------------------	---------------------------------------------	--

Substrate Temperature	Maximum	+30 °C
	Minimum	+10 °C

Substrate Moisture Content	Refer to the individual Product Data Sheet.	
-----------------------------------	---------------------------------------------	--

Waiting Time / Overcoating	When using Sikafloor®-1590 refer to the individual Product Data Sheet for specific information on waiting time to overcoating.	
-----------------------------------	--------------------------------------------------------------------------------------------------------------------------------	--

Before applying Sikafloor®-264 Plus on the broadcast primer allow:

Temperature	Minimum	Maximum
+10 °C	17 hours	3 days
+20 °C	9 hours	48 hours
+30 °C	7 hours	24 hours

Note: Times are approximate and will be affected by changing ambient conditions, particularly temperature and relative humidity.

Applied Product Ready for Use	Temperature	Foot traffic	Light traffic	Full cure
	+10 °C	30 hours	6 days	10 days
	+20 °C	24 hours	4 days	7 days
	+30 °C	16 hours	2 days	5 days

Note: Times are approximate and will be affected by changing ambient conditions, particularly temperature and relative humidity.

VALUE BASE

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

FURTHER DOCUMENTS

Refer to the following method statements:

- Sika Method Statement — Evaluation and preparation of surfaces for flooring systems
- Sika Method Statement — Sikafloor® mixing and application

ECOLOGY, HEALTH AND SAFETY

User must read the most recent corresponding Safety Data Sheets (SDS) before using any products. The SDS provides information and advice on the safe handling, storage and disposal of chemical products and contains physical, ecological, toxicological and other safety-related data.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

SIKA LIMITED

Watchmead
Welwyn Garden City
Hertfordshire, AL7 1BQ
Tel: 01707 394444
Web: www.sika.co.uk
Twitter: @SikaLimited



System Data Sheet
Sikafloor® MultiDur EB- 10
May 2025, Version 04.02
020811900000000236

SikafloorMultiDurEB-10-en-GB-(05-2025)-4-2.pdf