

## PRODUCT DATA SHEET

# Sikatherm® PIR AL

---

### PIR ALUMINIUM FACED THERMAL INSULATION BOARD

---

#### PRODUCT DESCRIPTION

Sikatherm® PIR AL is an insulation board for flat Roofing. It is faced on both sides with an aluminium composite foil bonded to the insulation core and produces a tough, durable, light weight insulation board.

#### USES

- Thermal insulation underneath specified Sika® roof waterproofing.

#### CHARACTERISTICS / ADVANTAGES

- Produced with a blowing agent with zero Ozone Depletion Potential (ODP)
- Ideal for new construction and refurbishment
- No separation layer for PVC membranes required
- High compressive strength
- Light weight and low load on the roofing structure
- FM Approved

#### APPROVALS / STANDARDS

- Factory Mutual (FM) Certificate

## PRODUCT INFORMATION

Packaging	Full length and width boards in protective wrapping
Shelf Life	5 years from date of production
Storage Conditions	Product must be stored in original unopened and undamaged sealed packaging in dry indoor conditions. If stored outside the boards must be stacked clear of the ground and covered with a polythene sheet or weatherproof tarpaulin. Boards that have become wet must be discarded. Always refer to packaging.
Density	~32 kg/m <sup>3</sup>
Dimensions	Board size: <u>2400 × 1200 mm</u> Products are available with square or with rebated edges with thicknesses from 40 up to 160 mm. 40 mm thick boards are only available with square edges.

## TECHNICAL INFORMATION

Compressive Strength	> 150 kPa at 10 % deformation	(EN 826)
Dimensional Stability	DS(70,90)3	(EN 1604)
Reaction to Fire	Euroclass RtF E	(EN 13501-1)
Thermal Conductivity	0,022 W/(m·K)	(EN 12667 / EN 12939)
	The λ-value quoted is in accordance with the Harmonised European Standard EN 13165: 2012 (Thermal insulation products for buildings – Factory made rigid polyurethane foam (PUR) products – Specification).	

## APPLICATION INFORMATION

Ambient Air Temperature	Refer to roof waterproofing membrane system temperature limitations in Product Data Sheets.
-------------------------	---

## APPLICATION INSTRUCTIONS

### SUBSTRATE QUALITY

The substrate surface must be uniform, smooth and free of any sharp protrusions or burrs, etc. It must be clean, dry and free of grease and dust.

### APPLICATION METHOD / TOOLS

#### Installation procedure

Reference must be made to further documentation where applicable, such as specification, application manual and installation or working instructions.


#### General

Sikatherm® PIR AL must be laid over a vapour control layer and attached to the substrate with mechanical fixings.

#### Fixing method

The number of mechanical fixings required to fix Sikatherm® PIR AL will vary with the geographical location of the building, the local topography and the height and width of the roof concerned along with the deck type. A minimum of 6 fixings are required to secure a 2,4 × 1,2 m insulation board to the deck. The requirement for additional fixings must be assessed in accordance with local national norms and standards. Mechanical fixings must be arranged in an even pattern. Fasteners at board edges must be located >50 mm and <150 mm from edges and corners of the board. Each fixing must incorporate a square or circular plate washer (minimum 50 mm × 50 mm or 50 mm diameter).

The requirements for securing the waterproofing membrane will be in accordance with relevant Product Data Sheet.

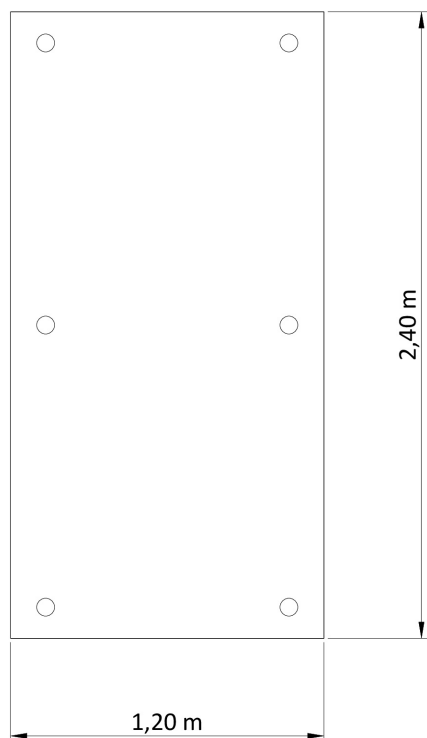

If Sikatherm® PIR AL is applied in a ballasted flat roof assembly, the ballast weight needs to be at least 80 kg/m<sup>2</sup>.

## LIMITATIONS

Installation work must only be carried out by Sika® trained contractors, experienced in this type of application.

- The product is not classified as hazardous good for transport. Local safety regulations must be observed.
- During the construction process, the construction should be protected from rain penetration during breaks in the process.
- The use of some ancillary products such as adhesives, cleaners and solvents is limited to temperatures above +5 °C. Observe temperature limitations in the appropriate Product Data Sheets.
- Special measures may be compulsory for installation below +5 °C ambient temperature due to safety requirements in accordance with national regulations.
- Not suitable for fully bonded roof build-ups.

## VALUE BASE

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

## ECOLOGY, HEALTH AND SAFETY

### REGULATION (EC) NO 1907/2006 - REACH

This product is an article as defined in article 3 of regulation (EC) No 1907/2006 (REACH). It contains no substances which are intended to be released from the article under normal or reasonably foreseeable conditions of use. A safety data sheet following article 31 of the same regulation is not needed to bring the product to the market, to transport or to use it. For safe use follow the instructions given in this product data sheet. Based on our current knowledge, this product does not contain SVHC (substances of very high concern) as listed in Annex XIV of the REACH regulation or on the candidate list published by the European Chemicals Agency in concentrations above 0.1 % (w/w)

## LEGAL NOTES

The information, and, in particular, the recommenda-

tions relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

**SIKA LIMITED**

Watchmead  
Welwyn Garden City  
Hertfordshire, AL7 1BQ  
Tel: 01707 394444  
Web: [www.sika.co.uk](http://www.sika.co.uk)  
Twitter: @SikaLimited

**SIKA IRELAND LIMITED**

Ballymun Industrial Estate  
Ballymun  
Dublin 11, Ireland  
Tel: +353 1 862 0709  
Web: [www.sika.ie](http://www.sika.ie)  
Twitter: @SikaIreland



**Product Data Sheet**

Sikatherm® PIR AL  
March 2020, Version 01.02  
020935011000011101

SikathermPIRAL-en-GB-(03-2020)-1-2.pdf

