

Sarnafil® PVC Walkway Pad

Injection moulded PVC Walkway Pad

Product Description Sarnafil® PVC Walkway Pad is made of high quality PVC from new Sarnafil® factory waste roofing membrane by injection moulding procedure.

Uses Sarnafil® PVC Walkway Pad is used to provide a durable slip resisting walkway for roof maintenance or access on any Sarnafil® G/S or Sikaplan® PVC roofing system.

Characteristics / Advantages

- Outstanding resistance to weathering, including UV irradiation
- Ease of application
- Excellent weldability
- Rainwater drainage from beneath the Sarnafil® PVC Walkway Pad is provided by a network of moulded channels
- Recyclable

Tests

Approvals / Standards

- Reaction to fire according to EN 13501-1
- Quality management system EN ISO 9001/14001
- BS 7976-2 Low (Dry & Wet)

Product Data


Form

Surface Chevron pattern

Colour Dark grey

Roofing

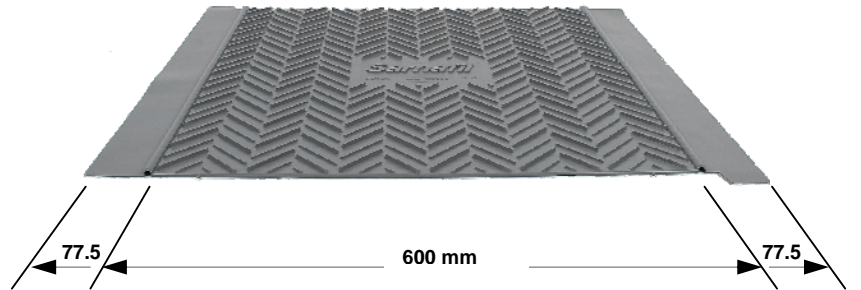

Appearance

Packaging Cartons of 20 pads

Storage

Storage Conditions Sarnafil® PVC Walkway Pad shall be stored in dry conditions.

Shelf-Life Sarnafil® PVC Walkway Pad does not expire during correct storage.

Technical Data

Material Basis Polyvinyl chloride (PVC)

Length 600 mm (+ 3 mm /- 3 mm)**Width** 600 mm (+ 3 mm /- 3 mm) without welding tabs**Thickness** 7.3 mm (+ 0.1 mm /- 0.1 mm) Including 3 mm non slip chevron pattern embossing

Mass per unit 2.3 kg/pad

**Reaction to fire,
freely suspended** Class E

EN 13501-1

System Information

System Structure	Compatible products:	<ul style="list-style-type: none">- Sarnafil® G 410 -types- Sarnafil® S 327 -types- Sarnafil® S 328 -types- Sikaplan® G
-------------------------	----------------------	--

Application Conditions / Limits

Temperature	The use of Sarnafil® PVC Walkway Pad is limited to geographical locations with average monthly minimum temperatures of -50 °C. Permanent ambient temperature during use is limited to +50 °C.
--------------------	--

Installation Instructions

Application Method	According to the valid installation instructions for Sarnafil®. Sarnafil® PVC Walkway Pad is installed on site by hot air welding the two 75 mm wide welding tabs directly onto the Sarnafil® G/S or Sikaplan® PVC membrane. By lapping the 75 mm wide in the same direction a Sarnamatic 661 can be used. As the Sarnafil® PVC Walkway Pad slightly expand when heated up, it is recommended to weld the PVC Walkway Pad in expanded condition onto the membrane. Leave a 3 mm gap when butting the Sarnafil® PVC Walkway Pad together.
---------------------------	--

Notes on Installation / Limits	Installation works must be carried out only by Registered Sarnafil Contractors. Temperature limits for the installation of the Sarnafil® PVC Walkway Pad: Substrate temperature: -30 °C min. / +60 °C max. Ambient temperature: -20 °C min. / +60 °C max. Installation of some ancillary products, e.g. contact adhesives / cleaners is limited to temperatures above +5 °C. Please observe information given by Product Data Sheets. Special measures may be compulsory for installation below +5 °C ambient temperature due to safety requirements in accordance with national regulations.
---------------------------------------	---

Roofing

Value Base	All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.
Local Restrictions	Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.
Ecology, Health and Safety Information	The product does not fall within the EC-regulation of hazardous goods. As a result, a material safety data sheet following EC-Guideline 91/155 EWG is not needed to bring the product to the market, transport or use it. The product does not damage the environment when used as specified.
Protective Measures	Fresh air ventilation must be ensured, when working (welding) in closed rooms. Regulatory safety requirements must be observed.
Transportation Class	The product is not classified as hazardous good for transport.
Disposal	The material is recyclable. Any disposal must be in accordance with regulatory requirements.

All data in our product information are based on our current knowledge and experience. They do not release users from careful testing of the application and strict observation of the relevant processing regulations because of the wide range of possible influences during the application and use of our products. Legally valid assurances of specific characteristics or suitability for special purposes of application other than those provided in our documentation for the specific product cannot be inferred from our information. Any protective rights or existing laws and provisions must be followed by the recipient or processor of our products at their own responsibility. Moreover our general terms and conditions of sale and guarantee are valid.



Sika Ltd, Bankside 300, Peachman Way, Broadland Business Park,
Norwich, NR7 0WF.

Tel: 01603 709360 Fax: 01603 433436 Email: sarnafilroofing@uk.sika.com

Registered Office: Sika Ltd, Watchmead, Welwyn Garden City, Hertfordshire, AL7 1BQ
Registered in England: 226822



Sarnafil®