



# Sikaflex<sup>®</sup>-291i

## THE VERSATILE SEALANT

- Simple and safe application
- Long open time
- Wide adhesion range

BUILDING TRUST



# Sikaflex®-291i


## THE STRONG MARITIME SEALANT

Sikaflex®-291i is a multi purpose one-component sealant and is used in the boat and ship building industry. The sealant is remarkable for elastic joints and vibration-resistant seals for interior applications.

Its medium modulus allows bonding applications with limited stress and thanks to the wide adhesion range Sikaflex®-291i adheres to most common used substrates in the marine industry.

### FEATURES AND BENEFITS

- Highly elastic
- Sea water and hydrolysis resistant
- Solvent free
- Non-corrosive
- Wide adhesion range

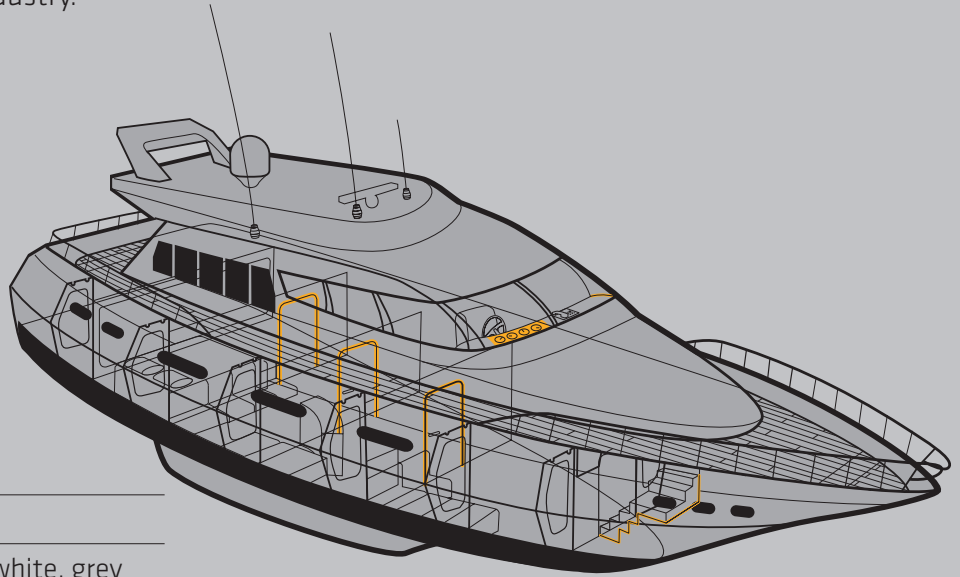

### Technical Properties

Colors	Black, white, grey
Tack-free time*	60 minutes approx.
Elongation at break (DIN 53504)	> 500%
Tensile strength (ISO 37)	1.8 MPa approx.
Application temperature	+10°C to +40°C
Service temperature (continuous) short term (up to 4 hours)	-40°C to +90°C +120°C
Shelf life (stored below 25°C)	12 months
Method of application	Hand- or air- gun

\* = at 23°C and 50% relative humidity

Our most current General Sales Conditions shall apply. Please consult the most current local Product Data Sheet prior to any use.



**SIKA SERVICES AG**  
Tueffenwies 16  
8048 Zurich  
Switzerland

**Contact**  
Phone: +41 58 436 40 40  
Fax: +41 58 436 55 30  
[www.sika.com/marine](http://www.sika.com/marine)

**BUILDING TRUST**

