


NOTE

CONSULT SIKA TECHNICAL  
DEPARTMENT IF ADHESION  
PROMOTING PRIMERS ARE  
REQUIRED

1. PRE-CAST CONCRETE OR OTHER  
MASONRY
2. SIKAFLEX PRO 2HP ONE PART  
POLYURETHANE SEALANT WITH  
FLAT FLUSH JOINT FINISH
3. CLOSED CELL POLYETHYLENE  
BACKING ROD

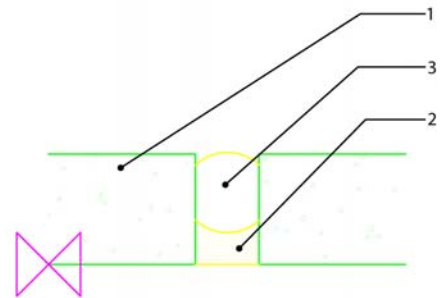

SIKA LIMITED  
SIKAFLEX PRO 2HP ONE PART POLYURETHANE SEALANT  
FACADE DETAIL WITH FLAT FLUSH JOINT FINISH  
SB006

The information, and, in particular, the recommendations relating to the application and end use of Sika® products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users should always refer to the most recent issue of the Product Data Sheet for the product concerned, copies of which will be supplied on request.