

SYSTEM DATA SHEET

Sika® FloorJoint PB-30 PD

CARBON FIBRE PREFABRICATED FLOOR JOINT SYSTEM FOR CAR PARKS

PRODUCT DESCRIPTION

Sika® FloorJoint PB-30 PD is a carbon fibre reinforced polymer (CFRP) composite, prefabricated, floor joint system with high mechanical resistance for normal up to medium wear loading conditions. Its sinusoidal surface tooth profile allows for an improved load distribution and results in minimum vibrations under direct car traffic. Gap widths: 0–60 mm.

USES

Sika® FloorJoint PB-30 PD may only be used by experienced professionals.

- Floor joint system for new build and refurbished joints in concrete / concrete screeds in:
- Inner zones of car park decks and ramps

CHARACTERISTICS / ADVANTAGES

- Grindable profile for level integration into the floor surface
- Reduced vibrations under direct car traffic
- Thermal expansion coefficient similar to resin based floors
- Easy to install / Easy to repair
- Short down time - Trafficable after 24 hours
- Waterproof system design possible
- High chemical resistance
- Non corroding
- High mechanical resistance

APPROVALS / STANDARDS

- Fire Testing DIN EN 13501-1, Sika® FloorJoint, Hoch, Test report No. PB-Hoch-140803-3
- Fire Testing DIN EN ISO 11925-2, Sika® FloorJoint, Hoch, Test report No. PB-Hoch-140801-3
- Fire Testing DIN EN ISO 9239-1, Sika® FloorJoint, Hoch, Test report No. PB-Hoch-140802-3

PRODUCT INFORMATION

Packaging Refer to individual Product Data Sheet.


Shelf Life Refer to individual Product Data Sheet.

Storage Conditions Refer to individual Product Data Sheet.

SYSTEM INFORMATION

System Structure

Sika® FloorJoint PB-30 PD

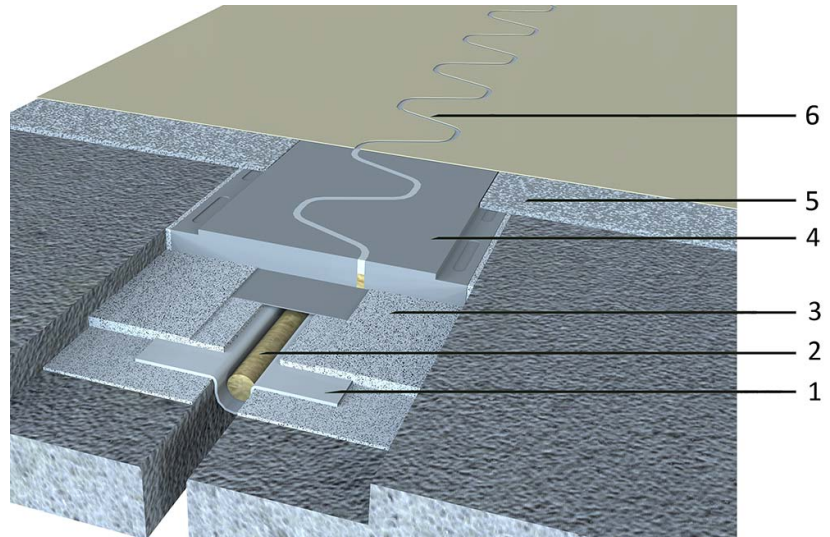

1. Waterproofing	Sikadur®-31 CF Normal + Sikadur® Combiflex® SG-10 P
2. Backing rod	Sika® Backing Rod, size according to joint width
3. Adhesive	Sikadur®-31 CF Normal
4. Floor panel	Sika® FloorJoint PD sealed with Sikaflex® Pro-3
5. Wearing course	Sikafloor®-Primer + Sikafloor®-Wear Layer, broadcast in excess
6. Top coat	Sikafloor®-Top Coat

Composition

Floor joint panel: Carbon fibre reinforced polymer.

TECHNICAL INFORMATION

Reaction to Fire	Bfl s1 (composite material of joint panel)	(EN 13301-1)
Chemical Resistance	Resistant to many chemicals. Contact Sika Technical Services for specific information.	

Gap width ¹	Positive joint movement ²	Negative joint movement ³
0 mm	+40.0 mm ⁴	-0 mm
5 mm	+37.5 mm ⁴	-5 mm
10 mm	+35.0 mm ⁴	-5 mm
15 mm	+32.5 mm ⁴	-5 mm
20 mm	+30.0 mm ⁴	-5 mm
25 mm	+27.5 mm ⁴	-5 mm
30 mm	+25.0 mm ⁴	-5 mm
35 mm	+22.5 mm ⁴	-5 mm
40 mm	+20.0 mm ⁴	-5 mm
45 mm	+17.5 mm ⁴	-5 mm
50 mm	+15.0 mm ⁴	-5 mm
55 mm	+12.5 mm ⁴	-5 mm
60 mm	+10.0 mm	-5 mm

1. Width of the gap in the concrete below Sika® floor Joint panel during installation.
2. Positive joint movement is the amount the gap can open, compared to its original width during installation of Sika® floor Joint panel. Do not exceed the maximum positive joint movement capacity, otherwise the teeth of the Sika® floor Joint panel become unsupported and may be damaged.
3. Negative joint movement is the amount the gap can close, compared to its original width during installation of the Sika® floor Joint panel.
4. The sealant may break at a positive joint movement of ~10–15 mm, however this does not affect the technical performance of Sika® Floor-Joint PB-30 PD. The purpose of the joint sealant is the reduction of dirt-pick-up in the joint, not to provide water tightness. Install Sikadur® Combiflex® SG System below Sika® FloorJoint PB-30 PD if a waterproof joint design is required.

APPLICATION INFORMATION

Consumption	Sika® FloorJoint PB-30 PD System:		
	Coating	Product	Consumption
Waterproofing	Sikadur®-31 CF Normal + Sikadur® Combiflex® SG-10 P	Adhesive: ~ 1.2 kg/linear meter; Combiflex tape: 1 m/linear meter	
Backing rod	Sika® Backing rod (size according to joint width)	1 m/linear meter	
Adhesive	Sikadur®-31 CF Normal	~ 3–5 kg/linear meter (depending of the depth of the cut-out)	
Floor Panel	Sika® FloorJoint PD jointed with Sikaflex® Pro 3	1 piece for 1.2 linear meter	

These figures are theoretical and do not allow for any additional material due to surface porosity, surface profile, variations in level or wastage etc.

Ambient Air Temperature	The ideal installation temperature is approx. +15 °C min. / +25 °C max. Refer to the product data sheet of the individual product for specific information.
Relative Air Humidity	80 % r.h. max.
Dew Point	Beware of condensation! The substrate and uncured floor must be at least 3 °C above dew point to reduce the risk of condensation or blooming on the floor finish.

Substrate Temperature

The ideal installation temperature is approx. +15 °C min. / +25 °C max. Refer to the product data sheet of the individual product for specific information.

Substrate Moisture Content

<4 % pbw moisture content.
Test method: Sika Tramex Meter, CM-measurement or Oven-Dry-Method. No rising moisture according to ASTM (Polyethylene-sheet).

Waiting Time / Overcoating

Before applying Sikadur®-31CF Normal + Sika®-FloorJoint PD on Sikadur®-31CF Normal + Sikadur®-Combiflex SG-10 P:

Substrate Temperature	Minimum	Maximum
+10 °C	24 hours	14 days
+20 °C	12 hours	10 days
+30 °C	8 hours	7 days

Before grinding and applying subsequent Sikafloor® resin on Sikadur®-31CF Normal + Sika®-FloorJoint PD allow:

Substrate Temperature	Minimum	Maximum
+10 °C	24 hours	14 days
+20 °C	12 hours	10 days
+30 °C	8 hours	7 days

Times are approximate and will be affected by changing ambient conditions particularly temperature and relative humidity.

Applied Product Ready for Use

Temperature	Foot traffic	Light traffic	Full cure
+10 °C	24 hours	72 hours	7 days
+20 °C	12 hours	30 hours	5 days
+30 °C	5 hours	24 hours	4 days

Times are approximate and will be affected by changing ambient conditions particularly temperature and relative humidity.

APPLICATION INSTRUCTIONS

APPLICATION

Refer to the Information Manual for Sika® FloorJoint PD.

FURTHER DOCUMENTS

Please refer to:

- Sika® Information Manual Mixing and Application of Flooring Systems
- Sika® Information Manual Surface Evaluation & Preparation

LIMITATIONS

- Products shall only be applied in accordance with their intended use.
- For outdoor use only if the traffic speed is limited to < 30 km/h (<19 mph), and if the polymer panel is coated with an UV protection e.g. with Sikafloor®-359 N.
- Always store Sika® FloorJoint PD panels in horizontal position.
- Never remove the masking tape affixed to the bottom side of the Sika® FloorJoint PD panel. The masking tape is necessary to keep the two composite parts of the panel separate, allowing the movement of the joint after installation.
- No relative vertical displacement of concrete slabs on both sides of the joint. Apply appropriate measures like anchoring/bolting or ground consolidation by in-

jection prior to installation of Sika® FloorJoint PB-30 PD if necessary.

- Do not exceed the maximum positive joint movement capacity, otherwise the teeth of Sika® FloorJoint PD become unsupported below and may crack.
- Settlement of the subsurface or of the adhesive can lead to cracks in Sika® FloorJoint PD. These cracks do not constitute a defect, since it does not affect the viability and suitability for use.
- Don't exceed the maximum grinding depth of 2 mm. If after grinding the letters on the top surface of the Sika FloorJoint® PD panel are no longer visible the maximum grinding depth of 2 mm has been exceeded and the mechanical resistance of the profile is reduced. Replace the panel if the maximum grinding depth has been exceeded.
- The joint movement of the building parts must be calculated by a structural engineer and made available to all parties involved
- The sealant may break at a positive joint movement of approx. 10–15 mm, however this does not affect the technical performance of Sika® FloorJoint PD. The purpose of the joint sealant is the reduction of dirt pick-up in the joint, not to provide water tightness. Install Sikadur® Combiflex® SG System below Sika® FloorJoint PB-30 PD in case a waterproof joint design is required.
- Periodically inspect the joint sealing material and renew if necessary.
- Continuously check the abrasion of the diamond cutting disk used for preparing the cut-out. Regularly re-adjust the disk to ensure all cuts are prepared with a constant depth of 25 mm

- Do not use a hammer for placing and adjusting the floor panel during installation.

VALUE BASE

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

SIKA LIMITED

Watchmead
Welwyn Garden City
Hertfordshire, AL7 1BQ
Tel: 01707 394444
Web: www.sika.co.uk
Twitter: @SikaLimited

SIKA IRELAND LIMITED

Ballymun Industrial Estate
Ballymun
Dublin 11, Ireland
Tel: +353 1 862 0709
Web: www.sika.ie
Twitter: @SikaIreland



System Data Sheet
Sika® FloorJoint PB-30 PD
February 2019, Version 02.01
020816900000000002

SikaFloorJointPB-30PD-en-GB-(02-2019)-2-1.pdf