
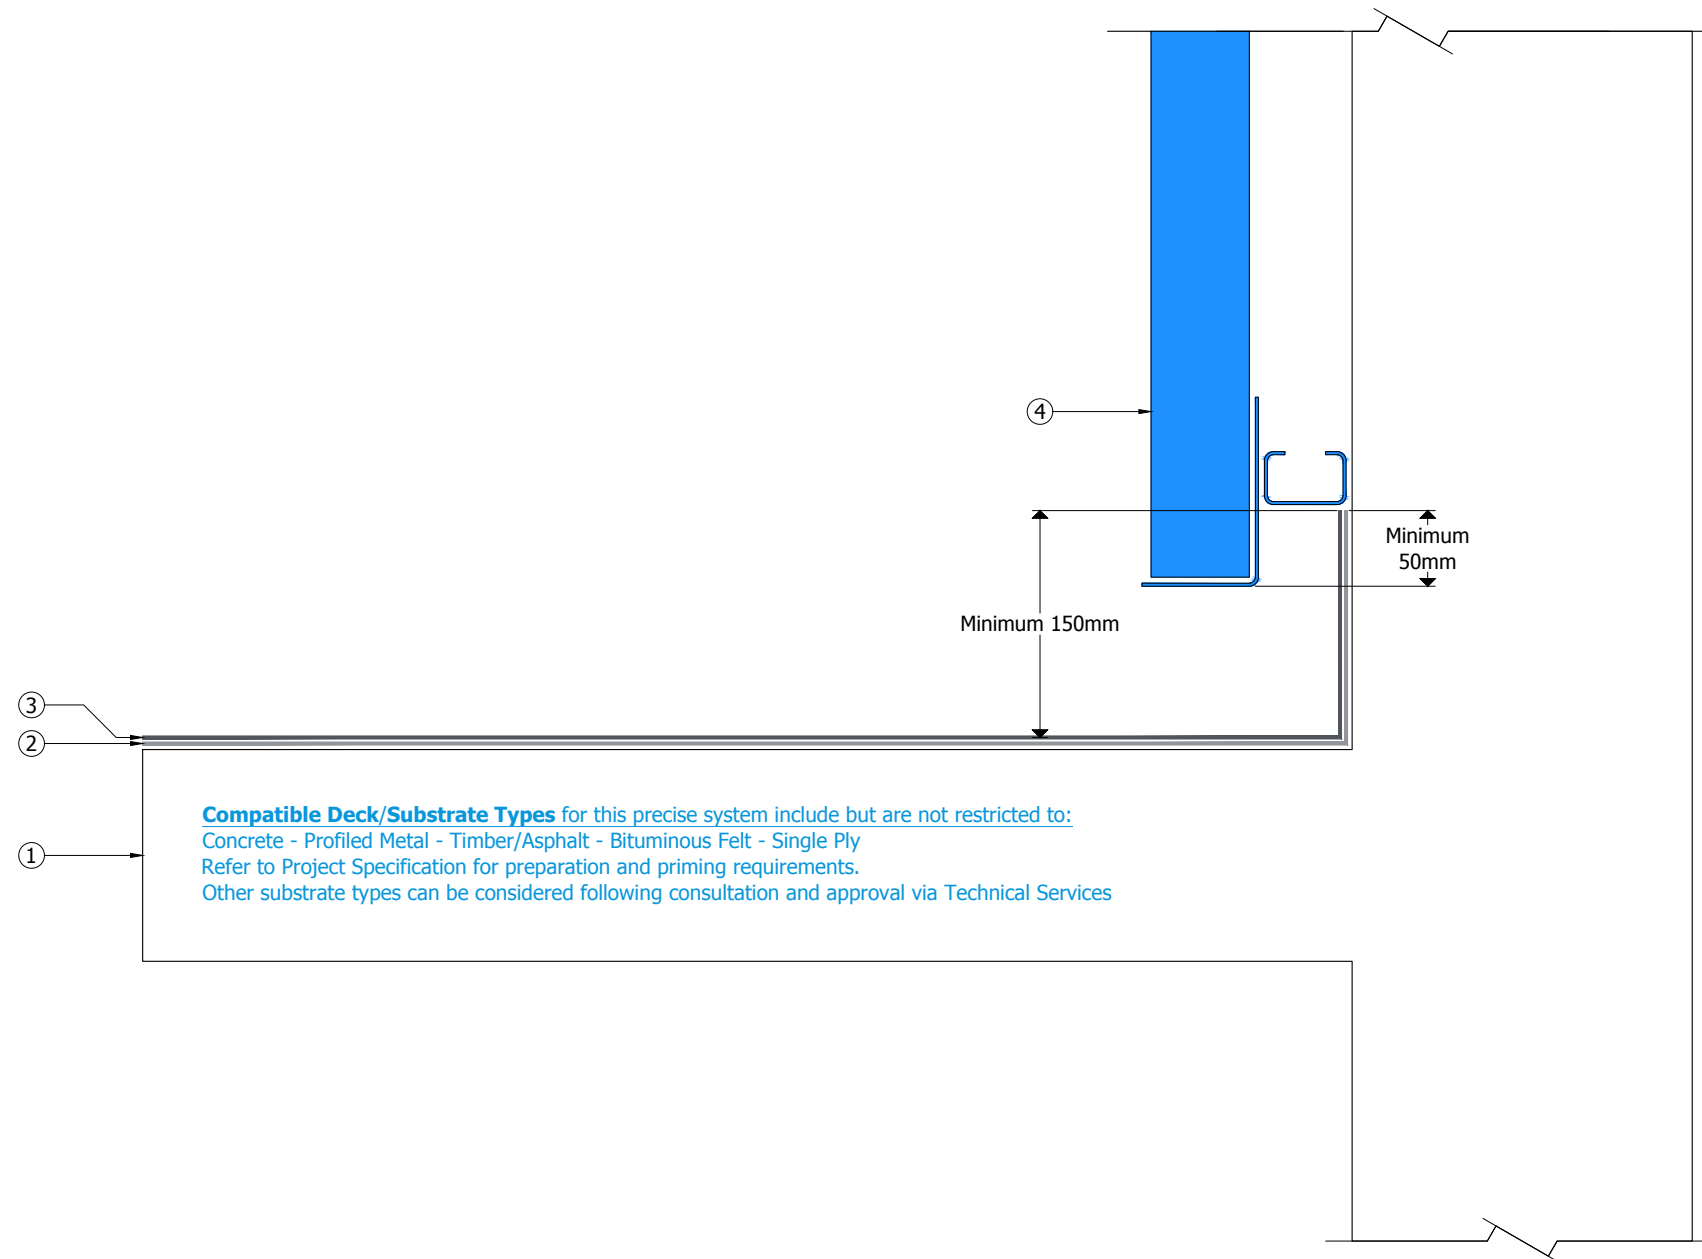



Key

- ① Existing deck/substrate prepared and primed in strict accordance with Sika Liquid Plastics Project Specification
 - ② **Sika Liquid Applied EMBEDMENT/BASE COAT** fully reinforced with **Sika Reinforcement** in strict accordance with Sika Liquid Plastics Project Specification
 - ③ **Sika Liquid Applied TOP COAT** applied in strict accordance with Sika Liquid Plastics Project Specification
 - ④ **EXISTING CLADDING:** Release existing cladding to allow access to the upstand during waterproofing application and reinstate to provide minimum 50mm weathering lap
- NOTE:** Exercise caution during exposed periods to prevent water ingress
NEW CLADDING: Installed in accordance with manufacturers instructions to provide a minimum 50mm weathering lap to the exposed edge of the Sika Liquid Applied Membrane

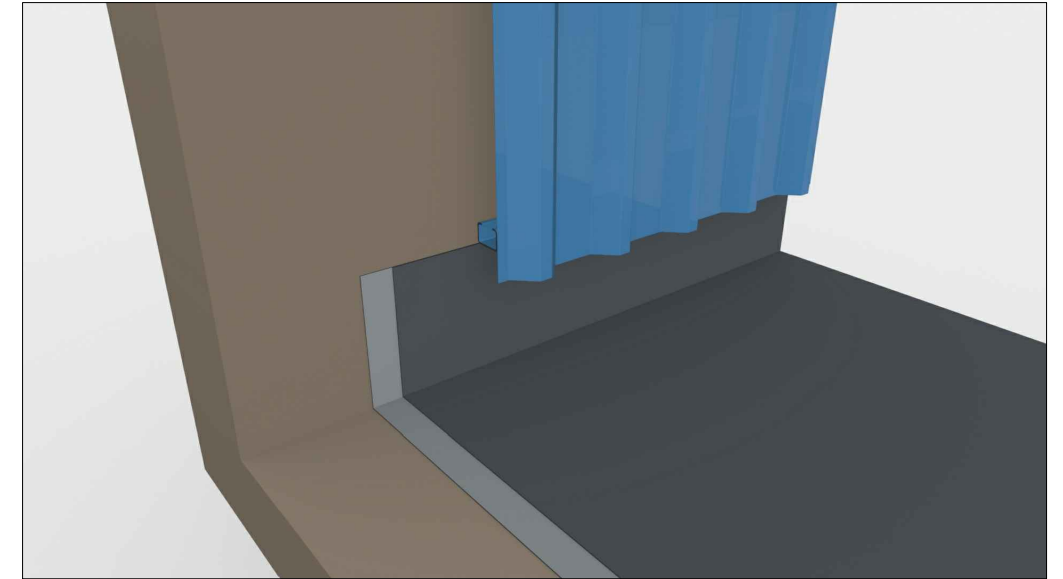

| | |
|--|------------|
| Drawing Status: CONSTRUCTION | |
| Project N ^o | |
| DWG N ^o | Revision |
| Project: | |
| Drawing Title: Waterproofing Application Upstand with Existing/New vertical cladding | |
| Scale: NTS @ A3 | Drawn: GRW |
| Date: June 2017 | |
| <small>This drawing is the confidential property of Sika Limited and must not be reproduced in whole or in part. All rights in respect of patents, design and copyrights are reserved. Moreover it is solely intended to illustrate the correct application of Sika Liquid Plastics products and systems, and must be read in conjunction with the appropriate specification and current issue of relevant Product Data Sheets. Elements bearing reference to structural and/or thermal design are shown indicatively and should not be used for any aspect of project design without consulting the relevant authorities.</small> | |
|  | |