



Sikaflex[®] -551

HIGH PERFORMANCE, LOW EMISSION ADHESIVE FOR GENERAL ASSEMBLY

BUILDING TRUST



PRODUCT DESCRIPTION

Sikaflex®-551 is a multifunctional, high strength and very low emission one-component elastic assembly adhesive based on the Sika Silane Terminated Polymer (STP) technology.

The Sikaflex®-551 formulation is isocyanate, solvent, phthalate and tin free and therefore surpasses the most demanding EHS requirements and sets a new benchmark in this regard. The advanced weathering, ageing and mold-resistance make Sikaflex®-551 a highly durable solution even under warm and humid conditions. It bonds well without the need for special pre-treatment to a wide variety of substrates such as timber, glass, metals, metal primers and paint coatings (2-part systems), ceramic materials and plastics. It is suitable for elastic, vibration-resistant joints and for a wide variety of interior and exterior elastic bonding applications. Meets VDI 6022 for HVAC applications and is qualified for incidental food contact.




TYPICAL APPLICATION AREAS

- General machinery, body and frame assembly
- Hygiene, ventilation and air conditioning systems
- Outdoor and indoor lighting industry
- Food processing and packaging machinery
- Food and beverage cooling devices



KEY PRODUCT FEATURES


- Equipped with fungicidal for ultimate mold and fungus resistance
- Excellent ageing and weathering resistance, high color stability
- Outperforms highest EHS standards as it is free of isocyanate, solvents, PVC, tin and phthalates
- Wide adhesion range, bonds well without the need for special pre-treatments
- Overall excellent mechanical performance

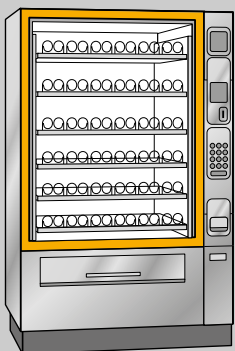

In construction of diverse automats, food and beverage cooling devices, many elastic bonding and sealing joints are required. Sikaflex®-551 serves as a valuable and durable solution.

TECHNICAL DATA

Chemical base	1-Component STP
Colour	White
Non-sag properties	Good
Application temperature	5°C – 40°C
Skin time	35 minutes
Shore A-hardness	45
Tensile strength	2.2 N/mm ²
Tear propagation resistance	14 N/mm ²
Elongation at break	500%
Service Temperature	-50°C to +90°C

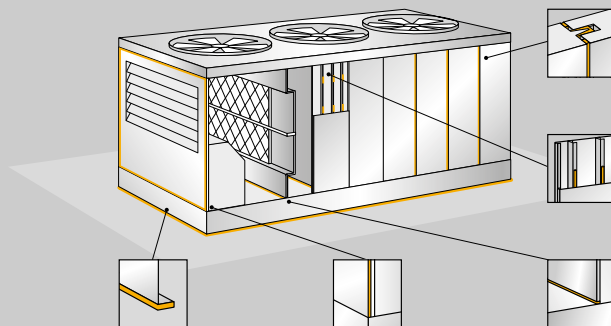

Elastic structural bonding and sealing of metal frame and body in heating, ventilation and air conditioning systems can be achieved with Sikaflex®-551 with ultimate mold and fungus resistance.

Our most current General Sales Conditions shall apply.
Please consult the most current local Product Data Sheet prior to any use.



SIKA LIMITED

Head Office
Watchmead
Welwyn Garden City
Hertfordshire, AL7 1BQ
United Kingdom

Contact

Phone +44 1 707 394444
E-Mail sealingandbondingenquiries@uk.sika.com
www.sika.co.uk/sealantsandadhesives
@SikaLimited

BUILDING TRUST

