

SYSTEM DATA SHEET

Sikafloor® MultiFlex PS-26

SMOOTH, UNICOLOR, TOUGH-ELASTIC POLYURETHANE FLOOR COVERING

PRODUCT DESCRIPTION

Sikafloor® MultiFlex PS-26 is a multipurpose, tough-elastic and smooth polyurethane flooring system and is part of the Sikafloor® Multiflex flooring range. Sikafloor® MultiFlex PS-26 is especially designed for use in different indoor industrial applications where seamless, smooth and glossy hardwearing floors are required.

Sikafloor® MultiFlex PS-26 consists of a tough-elastic, crack bridging polyurethane base coat which fulfils as well the stringent demands for low VOC emitting products.

USES

Sikafloor® MultiFlex PS-26 may only be used by experienced professionals.

- Life Science industry
- Automotive industry
- Food & Beverage industry
- Industrial flooring for Storage, Logistic and Sales areas
- Retail (e.g. Shopping Malls)

CHARACTERISTICS / ADVANTAGES

- Good mechanical resistance
- Crack-bridging properties
- Good chemical resistance
- Scratch resistant surface
- Low dirt pick up
- Easy to clean and maintain
- Seamless, gloss and smooth surface
- Low VOC content
- Flexible and tough-elastic

ENVIRONMENTAL INFORMATION

- Emission test according to the German AgBB-scheme and guidelines of the DiBt (AgBB – Committee for Health-related Evaluation of Building Products, DiBt – German Institute for Building Technology). Sampling, testing and evaluation were performed according to ISO-16000, Report No. G10003B, Eurofins Product Testing A/S, Denmark.
- Conformity with LEED v2009 IEQc 4.2: Low-Emitting Materials - Paints and Coatings


APPROVALS / STANDARDS

- Synthetic resin screed material according to EN 13813:2002, Declaration of Performance and provided with the CE mark
- Coating for surface protection of concrete according to EN 1504-2:2004, Declaration of Performance and provided with the CE mark
- Static crack bridging properties tested at IBOS GmbH, test report 30-13-027
- Fire classification reports No. 2012-B-3800/01 MPA Dresden
- ISEGA - EN1186, EN 13130, and prCEN/TS 14234 standards, and the Decree on Consumer Goods for contact with food stuffs, according to test report by ISEGA, Registered N° 33045 U 12, dated 31. January 2012
- Particle (vs.PA6) emission certificate: Cleanroom Suitable Materials - CSM. Statement of Qualification, class ISO 4. Tested by IPA report No. SI 1108-568.
- Particle (vs.PA6) emission certificate: Cleanroom Suitable Materials - CSM. Statement of Qualification, GMP A. Tested by IPA report No. SI 1108-568.
- Outgassing VOC emission certificate: Cleanroom Suitable Materials - CSM. Statement of Qualification, ISO-AMCm class -7.3. Tested by IPA report No. SI 1108-568.
- Biological Resistance Class “Very Good “–Cleanroom Suitable Materials. Evaluation of the biological resistance in accordance with ISO 846. Tested by IPA re-

SYSTEM INFORMATION

System Structure

Sikafloor® MultiFlex PS-26

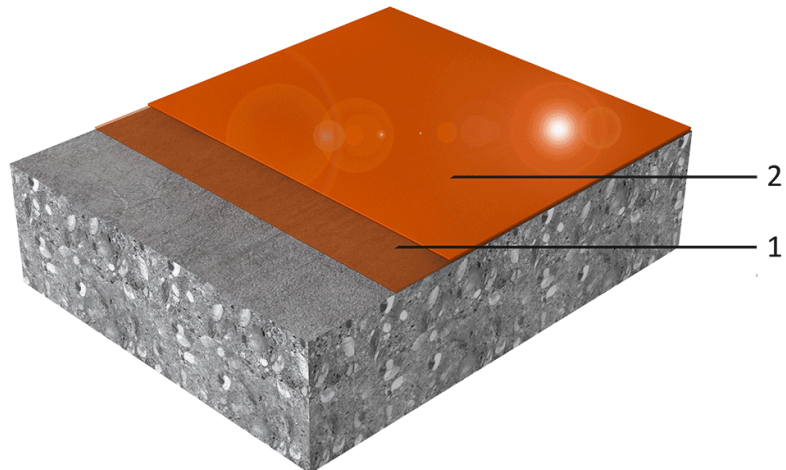

Layer	Product
1. Primer	Sikafloor®-161
2. Base coat	Sikafloor®-326 (filled 1:0.5-0.7 with quartz sand 0.1–0.3 mm)

Chemical base	Polyurethane
Appearance	Smooth, glossy finish
Colour	Standard colour on stock RAL 7032. Extended Colour Range on request.
Nominal Thickness	~ 2 mm
Volatile organic compound (VOC) content	Very low content of Volatile Organic Compounds. It fulfils the stringent demands for indoor air quality and low VOC emitting products AgBB, AFFSET, A+.

TECHNICAL INFORMATION

Shore D Hardness	~ 75 (14 days/+23 °C)	(DIN 53505)
Resistance to Impact	Class I	(ISO 6272)
Compressive Strength	~ 53 N/mm ²	(EN 196-1)
Tensile Strength	~ 9 N/mm ²	(ISO 527-2)
Tensile Adhesion Strength	> 2.0 N/mm ²	(EN 13892-8)
Tear Strength	~ 32 N/mm ²	(ISO 34-1)
Crack Bridging Ability	Class A4	(EN 1062-7)
Reaction to Fire	Cfl-s1	(EN 13501-1)
Chemical Resistance	Sikafloor® MultiFlex PS-26 is resistant to many chemicals. Please refer to the chemical resistance of Sikafloor® -326.	
Permeability to Water Vapour	Class III	(EN ISO 7783-1)
Capillary Absorption	w<0,01 kg/(m ² x h ^{0,5})	(EN 1062-3)
Permeability to CO2	Sd = 2020 m	(EN 1062-6)
Skid / Slip Resistance	R10	(DIN 51130)

APPLICATION INFORMATION

Consumption	Layer	Product	Consumption
	1. Primer	Sikafloor®-161	~0.4 kg/m ² /layer
	2. Base coat	Sikafloor®-326 (filled 1:0.5–0.7 with quartz sand 0.06–0.3 mm)	~1.8 kg/m ² /layer (mix- ture)
Consumptions are theoretical and do not include any wastage or additional materials needed due to porosity, substrate profile etc.			
Product Temperature	+10 °C min. / +30 °C max.		
Ambient Air Temperature	+10 °C min. / +30 °C max.		
Relative Air Humidity	80 % max.		
Dew Point	Beware of condensation! The substrate and uncured floor must be at least 3 °C above dew point to reduce the risk of condensation or other disturbance of the surface on the floor finish		
Substrate Temperature	+10 °C min. / +30 °C max.		
Substrate Moisture Content	Sikafloor® MultiFlex PS-26 can be installed on substrates with moisture content of max. 4 % (checked by Tramex). The substrate needs to be visibly dry and have adequate pull-off strength min 1.5 N/mm ² . Check rising moisture.		
Applied Product Ready for Use	Temperature	Foot traffic	Light traffic
	+10 °C	~ 48 hours	~ 5 days
	+20 °C	~ 24 hours	~ 3 days
	+30 °C	~ 16 hours	~ 2 days
		Full cure	
			~ 14 days
			~ 7 days
			~ 5 days
Note: Times are approximate and will be affected by changing ambient and substrate conditions			

PRODUCT INFORMATION

Packaging	Please refer to the individual Product Data Sheets
Shelf Life	Please refer to the individual Product Data Sheets
Storage Conditions	Please refer to the individual Product Data Sheets

MAINTENANCE

CLEANING

Please refer to the Sikafloor®- Cleaning Regime

FURTHER DOCUMENTS

Substrate Quality & Preparation

Please refer to Sika Information Manual: "Evaluation and preparation of surfaces for flooring systems".

Application Instructions

Please refer to Sika Information Manual: "Mixing & Application of flooring systems".

Maintenance

Please refer to "Sikafloor®- Cleaning regime".

LIMITATIONS

- Freshly applied Sikafloor® products must be protected from damp, condensation and water for at least 24 hours.
- Uncured material reacts in contact with water (foam-

ing).

- During application care must be taken that no sweat drops into fresh Sikafloor® products (wear head and wrist bands).
- For exact colour matching, ensure the Sikafloor® product in each area is applied from the same control batch number.
- Under certain conditions, underfloor heating or high ambient temperatures combined with high point loading, may lead to imprints in the resin.
- If heating is required do not use gas, oil, paraffin or other fossil fuel heaters, these produce large quantities of both CO₂ and H₂O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.

VALUE BASE

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

SIKA LIMITED

Watchmead

Welwyn Garden City
Hertfordshire, AL7 1BQ
Tel: 01707 394444
Web: www.sika.co.uk
Twitter: @SikaLimited

SIKA IRELAND LIMITED

Ballymun Industrial Estate

Ballymun
Dublin 11, Ireland
Tel: +353 1 862 0709
Web: www.sika.ie
Twitter: @SikaIreland



SikafloorMultiFlexPS-26_en_GB_(03-2017)_2_1.pdf