

SYSTEM DATA SHEET

Sikalastic® OneShot PB-56 UV

POLYUREA UV STABLE WATERPROOFING DECK MEMBRANE SYSTEM

PRODUCT DESCRIPTION

Sikalastic® OneShot PB-56 UV is a 3-part polyurea resin based sprayed membrane system that provides a crack bridging, fast cure, hard wearing, seamless finish for exposed car parking decks. The surface produces a slip resistant, low maintenance coloured matt finish. Thickness ~ 4.0 mm

USES

Sikalastic® OneShot PB-56 UV may only be used by experienced professionals.

- Exposed car park concrete suspended decks and ramps.

CHARACTERISTICS / ADVANTAGES

- Seamless
- UV stable
- High wear resistance
- Good chemical and mechanical resistance
- Waterproof
- Rapid spray applied application
- Skid/slip resistant
- Low maintenance
- Unique one shot embedded aggregate injection system provides a sprayed surface texture


APPROVALS / STANDARDS

- Dynamic and static crack bridging properties. DIN EN 1062-7. Kiwa Polymer Institut GmbH. Report No.P 9016-3-E. 2014-09-30
- Reaction to fire classification. DIN EN 13501-1. Prüfinstitut Hoch. Report No.KB-Hoch-150202. Validity 28-02-2020
- Tests on the coating system test category OS 11 (OS F) / system a. DIN V 18026. Kiwa GmbH, Polymer Institut. Report No. P 9278-1-E. 2015-08-20
- Adhesive strength testing for thermal compatibility. DIN EN 13687-2 and DIN EN 13687-1. Kiwa GmbH, Polymer Institut. Report No.P 9278-2. 2015-08-20.
- Testing slip resistance "Ramp Test". DIN 51130.MP1. Materialprüfung und Entwicklung. Test Certificate No.127023-S/14. Validity 11-03-2019.
- Abrasion by studded tyres. SS-EN 12697-16. Provningsrapport.Report No.VTInr: 14-183eng. 2014-11-07.

SYSTEM INFORMATION

System Structure

Sikalastic® OneShot PB-56 UV

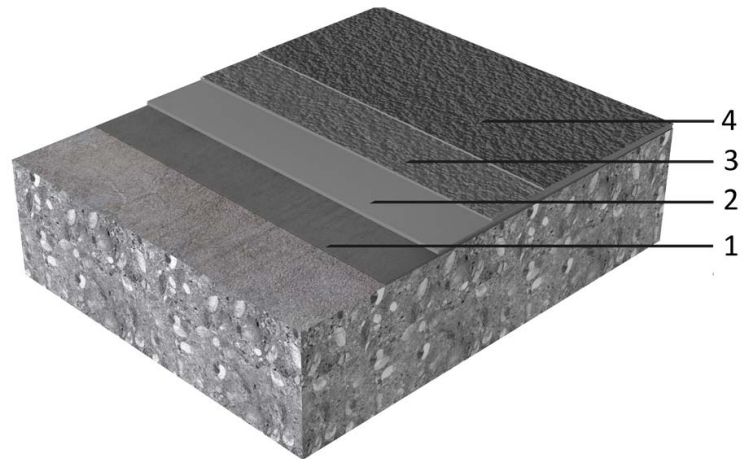

Layer	Product
1. Primer + Sand broadcast	Sikafloor®-150/151 + quartz sand 0.3–0.8 mm
2. Waterproofing membrane	Sikalastic®-8800
3. Wearing finish	Sikalastic®-8800, injection of aggregate, i.e. corundum, silicon carbide or quartz sand
4. Seal / Top coat	Sikafloor®-359 N

Composition	Primer:	Epoxy resin
	Membrane and wearing finish	Pure Polyurea
	Seal / Top coat	Aliphatic Polyurethane, solvent based

Appearance	Skid / Slip resistant, matt finish
------------	------------------------------------

Colour	Seal / Top coat available in many colours
--------	---

Nominal Thickness	~4.2 mm
-------------------	---------

TECHNICAL INFORMATION

Shore A Hardness	~87	(DIN ISO 7619-1)
Abrasion Resistance	A1.114mg (H22/1000/1000) 0.7 g weight loss	(EN ISO 5470-1:1999; ASTM D 4060) (EN 12967-16:2004 Method A)
Resistance to Impact	No cracks	(EN ISO 6272-2)
Tensile Adhesion Strength	> 1.5 N/mm ² to concrete	(EN 1542)
Chemical Resistance	Test passed Chemical resistant to de-icing salts, hydro carbons and hydraulic oils. Contact Sika technical service for specific information.	(EN 13529)
Permeability to Water Vapour	Class 1	(ISO EN 7783:2012-02)
Capillary Absorption	<0.1 kg/(m ² × h ^{0.5})	(EN 1062-3:2008)
Permeability to CO ₂	Sd > 50 m	(EN 1062-6:2002-10)
Skid / Slip Resistance	~63 dry; ~61 wet R12; V8	(BS 7976 1-3:2002) (DIN 51130; BGR 181)

APPLICATION INFORMATION

Consumption	Layer	Product	Consumption
	1. Primer + Sand broadcast	Sikafloor®-150/-151 quartz sand 0.3–0.8mm	~0.4 kg/m ² ~1.0 kg/m ²
	2. Waterproofing membrane	Sikalastic®-8800	~1.5 kg/m ²
	3. Wearing finish	Sikalastic®-8800 aggregate (silicon carbide, corundum, quartz sand)	~1.0 kg/m ² ~2.0 kg/m ²
	4. Seal / Top Coat	Sikafloor®-359 N	~0.8 kg/m ²

PRODUCT INFORMATION

Packaging	Refer to related Product Data Sheets
Shelf Life	Refer to related Product Data Sheets
Storage Conditions	Refer to related Product Data Sheets

MAINTENANCE

application and curing

CLEANING

Refer to Sika Information Manual Sikafloor® -Cleaning Regime

VALUE BASE

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

FURTHER DOCUMENTS

- Sika Information Manual : "Evaluation and preparation of surfaces for flooring systems"
- Sika Information Manual : "Mixing & Application of flooring systems"
- Sika Information Manual : "Injection of aggregates in the spray pattern of Sikalastic®-8800"

LIMITATIONS

- Freshly applied Sikalastic® OneShot PB-56 UV must be protected from damp, sweat, condensation and water for at least 2 hours
- The incorrect assessment and treatment of cracks may lead to a reduced service life time and reflective cracking
- For exact colour matching, ensure Sikafloor®-359 N is applied from the same control batch number
- If heating is required do not use gas, oil, paraffin or other fossil fuel heaters, these produce large quantities of both CO₂ and H₂O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.
- Always ensure adequate fresh air ventilation during

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

SIKA LIMITED

Watchmead
Welwyn Garden City
Hertfordshire, AL7 1BQ
Tel: 01707 394444
Web: www.sika.co.uk
Twitter: @SikaLimited

SIKA IRELAND LIMITED

Ballymun Industrial Estate
Ballymun
Dublin 11, Ireland
Tel: +353 1 862 0709
Web: www.sika.ie
Twitter: @Sikalreland



System Data Sheet
Sikalastic® OneShot PB-56 UV
March 2020, Version 01.03
02081290000000039

SikalasticOneShotPB-56UV-en-GB-(03-2020)-1-3.pdf